

STONE EFFECT

**Realstone\_Slate XT20**  
Collection





R64A 800X800 Realstone\_Slate Xt20 Black Rett. 80x80cm


## Realstone\_Slate XT20

Realstone\_Slate XT20 is produced in the thickness of 20 mm in the two 50x100 and 80x100 cm sizes and in the Shell, Iron, Musk and Black colours, with a large assortment of trims. In the extra-thick 20 mm variant, Realstone\_Slate is also ideal for dry installation on gravel, grass and sand, for raised floorings and for use on driveways.




R648 800X800 Realstone\_Slate Xt20 Musk Rett. 80x80cm

Colorbody Fine Porcelain Stoneware




**Black**

Size	Superficie	Code	Description	Thikness	Rett.	Caratteristiche tecniche	Use	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Premium Tech.	Scatole	Mq	Kg	Pallet	Mq	Kg
80x80cm	Structured Surface	R64A	800x800 Realstone_slate Xt20 Black Rett.	MM 20	•			R11B	> 0.40	Class 3	36+ Slider 96		>= 0.60	H	V2		1	0,64	28,50	45	28,80	1.282,28



**Iron**


Size	Superficie	Code	Description	Thikness	Rett.	Caratteristiche tecniche	Use	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Premium Tech.	Scatole	Mq	Kg	Pallet	Mq	Kg
80x80cm	Structured Surface	R645	800x800 Realstone_slate Xt20 Iron Rett.	MM 20	•			R11B	> 0.40	Class 3	36+ Slider 96		>= 0.60	H	V2		1	0,64	28,36	45	28,80	1.276,03
120x120cm	Structured Surface	RC9F	Realstone_slate Xt20 Iron Rt	MM 20	•			R11B	> 0.40	Class 3	36+ Slider 96		>= 0.60	H	V2		1	1,44	57,32	18	25,92	1.031,85





**Musk**

Size	Superficie	Code	Description	Thikness	Rett.	Caratteristiche tecniche	Use	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Premium Tech.	Scatole	Mq	Kg	Pallet	Mq	Kg
80x80cm	Structured Surface	R648	800x800 Realstone_slate Xt20 Musk Rett.	MM 20	•			R11B	> 0.40	Class 3	36+ Slider 96		>= 0.60	H	V2		1	0,64	28,34	45	28,80	1.275,47



Colorbody Fine Porcelain Stoneware



**Shell**

Size	Superficie	Code	Description	Thikness	Rett.	Caratteristiche tecniche	Use	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Premium Tech.	Scatole	Mq	Kg	Pallet	Mq	Kg
80x80cm	Structured Surface	R643	800x800 Realstone_slate Xt20 Shell Rett.	MM 20	•			R11B	> 0.40	Class 3	36+ Slider 96		>= 0.60	H	V2		1	0,64	28,44	45	28,80	1.280,00

Caratteristiche Tecniche

-  Frost proof
-  Resistance deep abrasion

Destinazioni d'uso

**D**  
 Tiles suitable only for residential bathrooms and bedrooms; any type of abrasion must be avoided.

**E**  
 Tiles suitable for any room of a house except for entrance areas and kitchens. Low stress abrasive wear.

**F**  
 Tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.

Variazioni cromatiche

**V0**  
 Monochromatic - V0: tiles of the same shade are very uniform, in just one colour

**V1**  
 Uniform appearance - V1: uniform colour with only minimal differences between tiles in the same production run

**V2**  
 Slight variation - V2: clearly distinguishable differences in texture and pattern within the same production run




















**G**  
 Materials suitable for rooms subject to medium-heavy abrasion, such as detached houses and light-traffic commercial buildings.


**H**  
 Materials suitable for situations of relatively hard abrasion in environments without protection against scratching, both public and private.

**V3**  
 Moderate variation - V3: significant variation in texture, pattern and colour from tile to tile within the same production run. The colour range should be viewed before selecting the material

**V4**  
 Substantial/random variation - V4: random differences from tile to tile. One tile may have totally different texture and colour from another. The colour range should be viewed before selecting the material

Certificazioni

							
ISO 14001	ISO 45001	ISO 9001	Green Building Council	GPP	EPD Italy	ISO 17889-1	Greenguard
							
LEED Credits	QBUPEC F+	FDES	Declare	HPD	CAM Sassuolo	CAM Casiglie	CCC
							
CE 001MRZI	UKCA 00 1MRZUK	SASO					

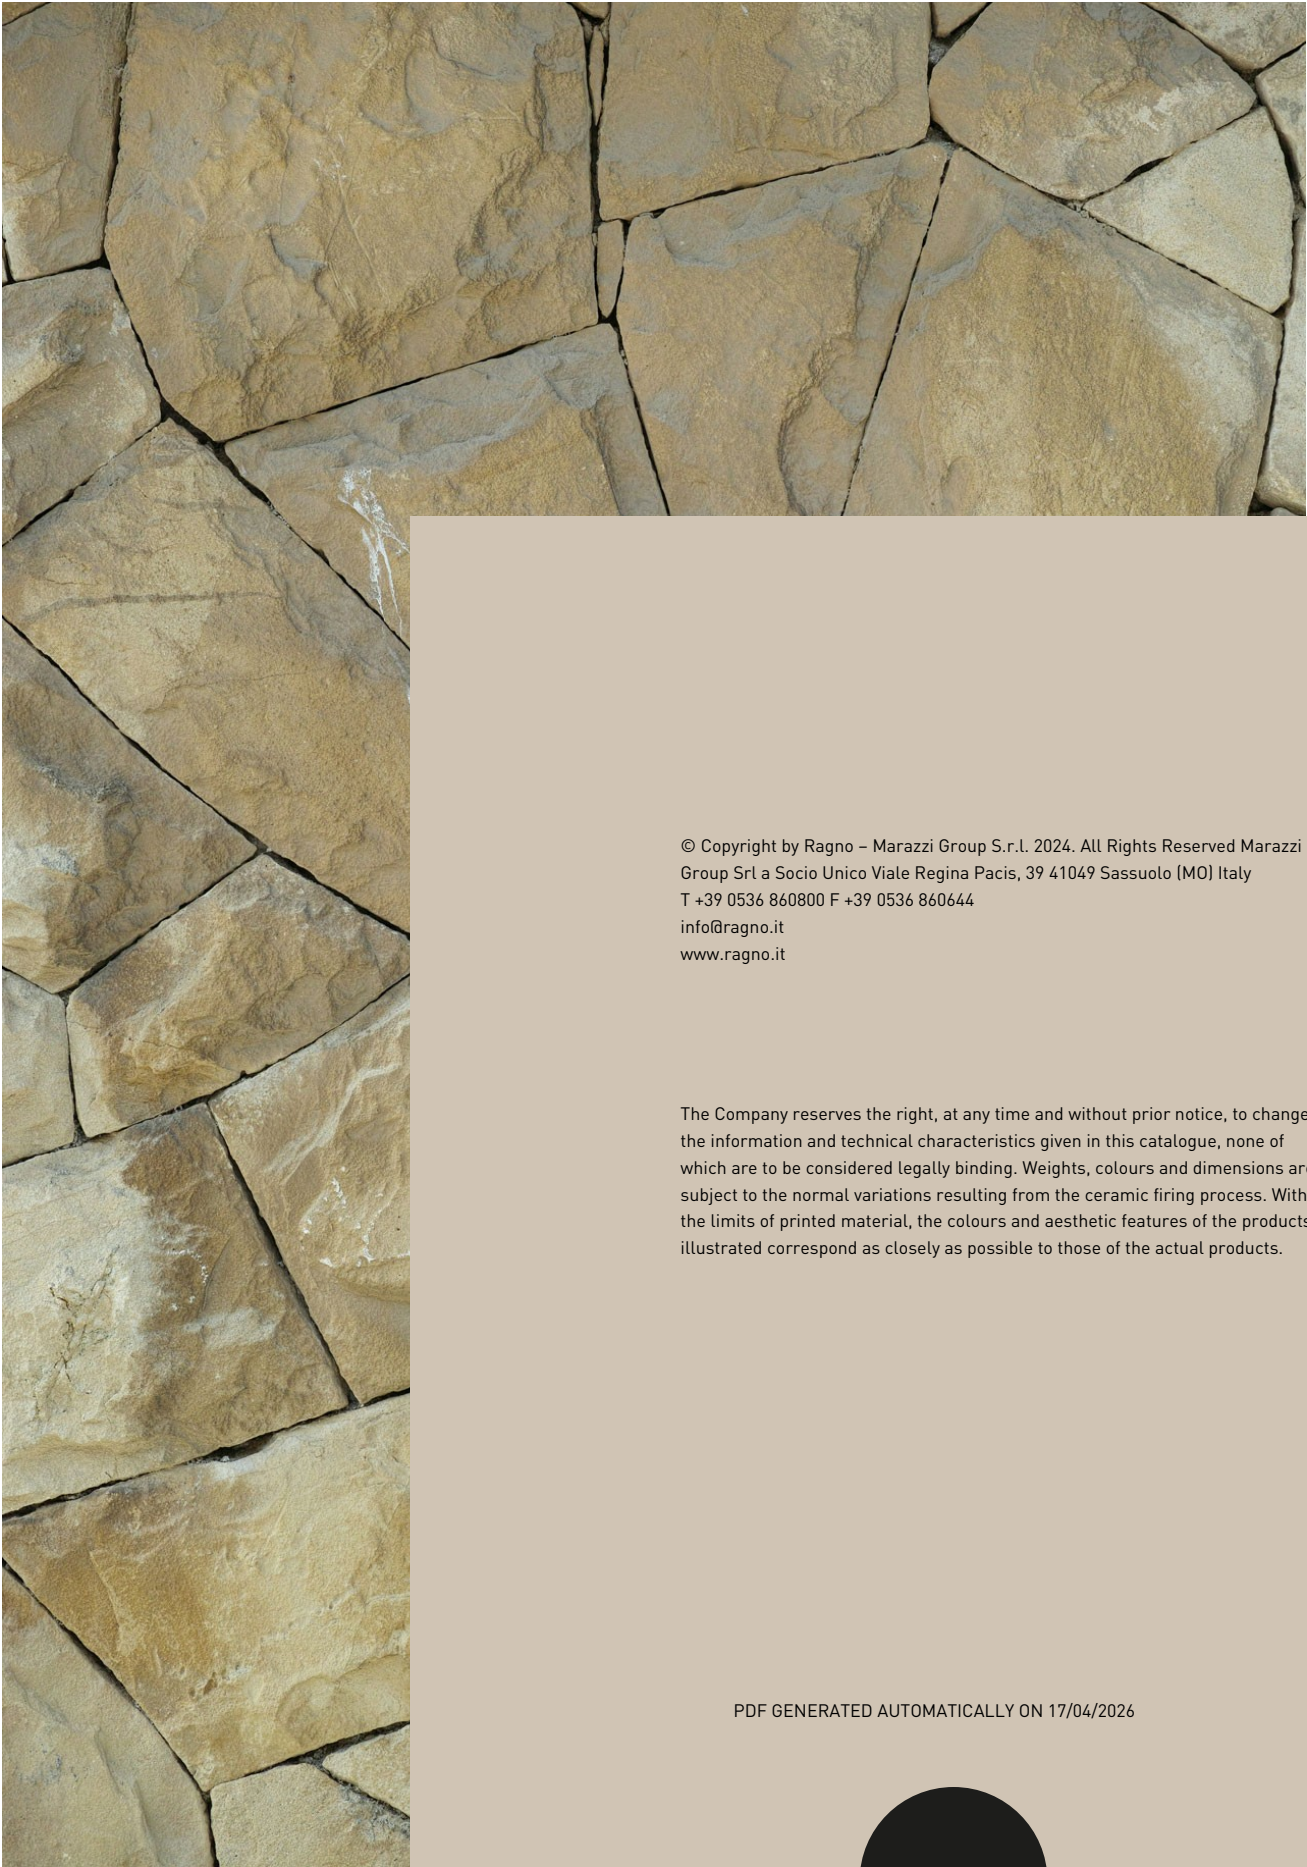

© Copyright by Ragno – Marazzi Group S.r.l. 2024. All Rights Reserved Marazzi Group Srl a Socio Unico Viale Regina Pacis, 39 41049 Sassuolo (MO) Italy  
T +39 0536 860800 F +39 0536 860644  
info@ragno.it  
www.ragno.it

The Company reserves the right, at any time and without prior notice, to change the information and technical characteristics given in this catalogue, none of which are to be considered legally binding. Weights, colours and dimensions are subject to the normal variations resulting from the ceramic firing process. Within the limits of printed material, the colours and aesthetic features of the products illustrated correspond as closely as possible to those of the actual products.

PDF GENERATED AUTOMATICALLY ON 17/04/2026

**RAGNO**